

ALUMINIUM CLAD LIFT & SLIDE DOOR

Size limits





Max. sash weight 400 kg, Max. sash height / width ratio must be ≤ 2.5


^{* -} symmetrical split


ALUMINIUM CLAD LIFT & SLIDE DOOR


92 EUROPA Frame



















IMPORTANT NOTE!




Scale 1:4




ALUMINIUM CLAD LIFT & SLIDE DOOR


92 EUROPA Frame

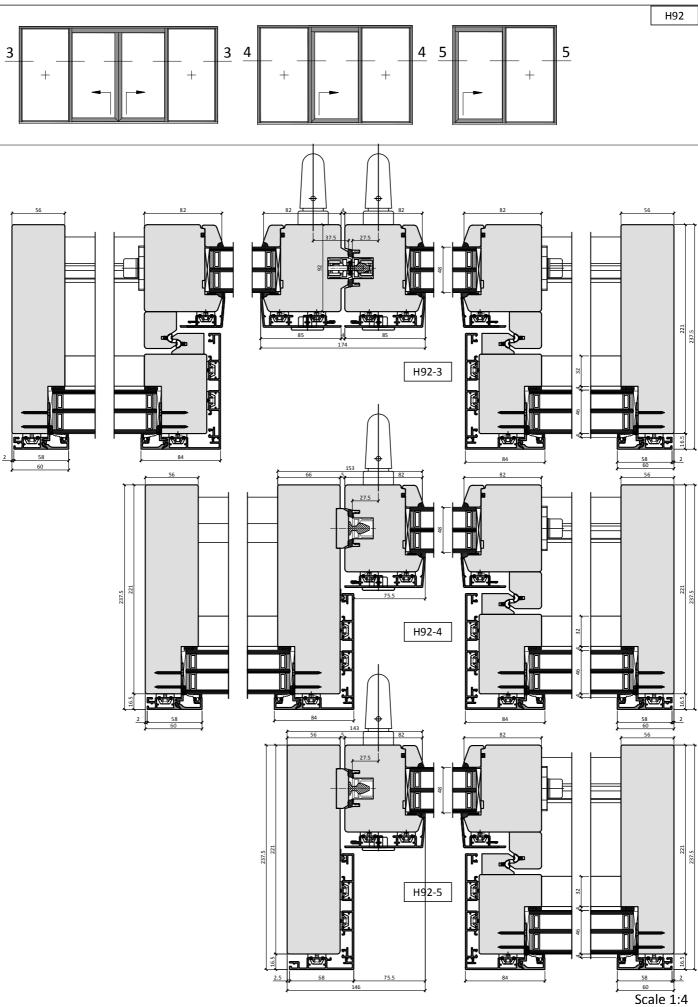





Coupling details

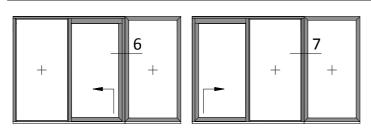





LIFT & SLIDE DOOR COUPLING WITH 92 EUROPA FIXED WINDOW










fixed window glass unit(s) is supplied not sealed with silicone and temporary fixed with glazing bead for easier frame fixing on site

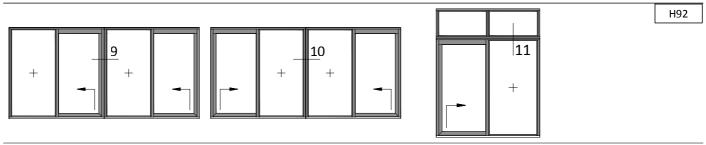

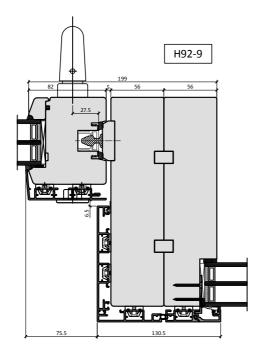







H92


ALUMINIUM CLAD LIFT & SLIDE DOOR

Toplight




92 EUROPA

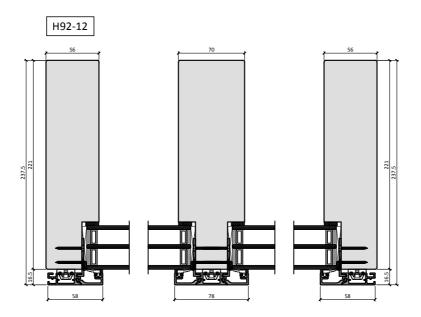











LIFT & SLIDE DOOR COUPLING WITH 92 EUROPA FIXED WINDOW

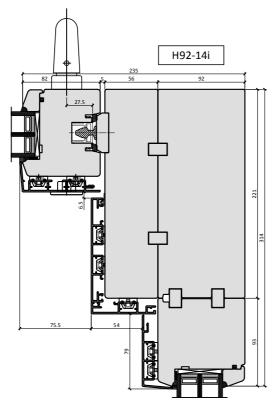

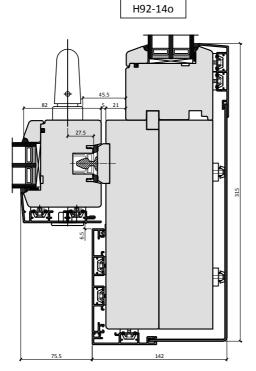

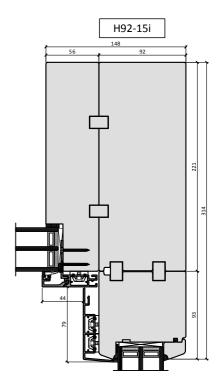

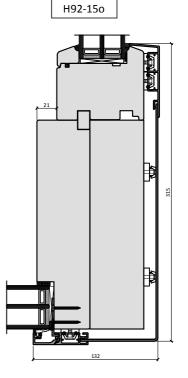

fixed window glass unit(s) is supplied not sealed with silicone and temporary fixed with glazing bead for easier frame fixing on site

Scale 1:4



